


SKIMMER

Made from UV-treated ABS, this surface fitting is designed to remove floating impurities such as leaves, insects and other debris. It plays an essential role in the proper operation of the filtration system by ensuring a continuous supply to the filtration circuit. Robust and durable, it is perfectly suited to outdoor environments exposed to sunlight.

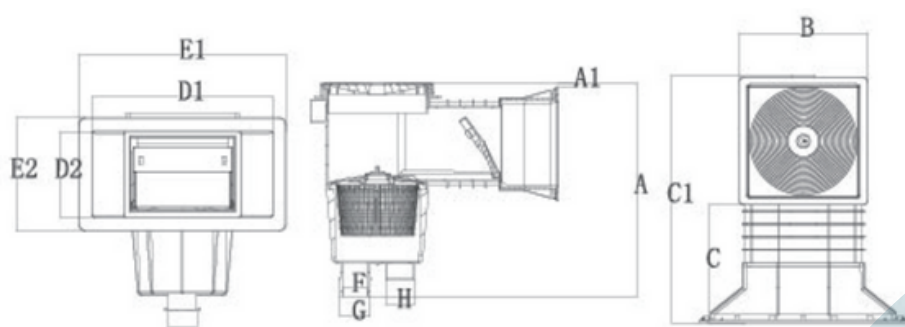

Model	A	A1	B	C	C1	D1	D2	E1	E2	F	G	H
PA00250C	416	8.75	249	229.6	483.7	352.6	167.3	405.3	220.3	1½"	2"	2"

Features

Connection	Ø 50 mm (suction) + Ø 32 mm overflow
Recommended flow rate	5 to 7 m³/h per skimmer
Removable lid	with integrated pre-filter basket
Floating weir flap	to limit debris return
Resistance	UV, chlorine and water treatment chemicals